
TRITON GREY



RECOMMENDED APPLICATIONS

RECOMMENDED APPLICATIONS			TECHNICAL SPECIFICATIONS			
FLOORS & WALLS	SHOWER FLOORS & WALLS	EXTERIOR PAVING FREEZE THAW STABLE	COMPRESSIVE STRENGTH	TENSILE STRENGTH	WATER ABSORPTION	BULK DENSITY
YES	YES	NO	1,410 kg/cm ²	142 kg/cm ²	0.25%	2720 kg/m3

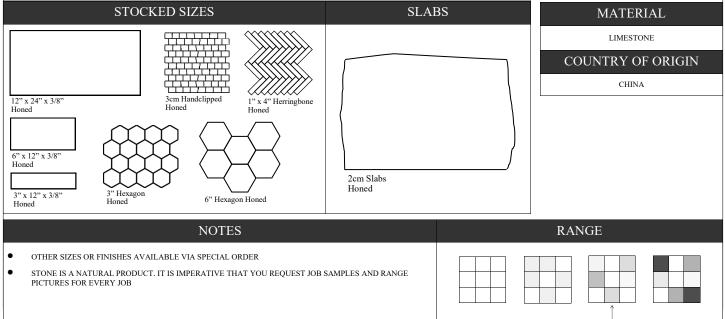

SP