
BELGIAN BLUESTONE: Roman Antiqued SP



| RECOMMENDED APPLICATIONS | | | | |
|--------------------------|--------------------------|---------------------------------------|--|--|
| FLOORS & WALLS | SHOWER FLOORS & WALLS | EXTERIOR PAVING FREEZE THAW STABLE | | |
| YES | YES | NO * | | |

| TECHNICAL SPECIFICATIONS | | | | |
|--------------------------|------------------------|---------------------|------------------------|--|
| COMPRESSIVE STRENGTH | TENSILE STRENGTH | WATER ABSORPTION | BULK DENSITY | |
| 157.9 N/mm ² | 16.7 N/mm ² | 0.28% | 2687 kg/m ³ | |

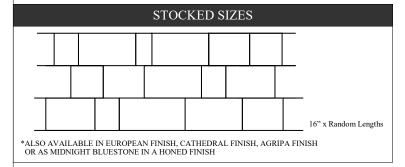

| MATERIAL | | |
|-------------------|--|--|
| LIMESTONE | | |
| COUNTRY OF ORIGIN | | |
| BELGIUM | | |

| NOTES | RANGE | |
|---|-------|--|
| OTHER SIZES OR FINISHES AVAILABLE VIA SPECIAL ORDER STONE IS A NATURAL PRODUCT. IT IS IMPERATIVE THAT YOU REQUEST JOB SAMPLES AND RANGE PICTURES FOR EVERY JOB * AGRIPA 3/4" THICK MATERIAL IS APPROPRIATE FOR EXTERIOR USE ** ALL INSTALLATIONS MUST BE PROPERLY SEALED TO AVOID STAINING AND PREMATURE AGING | ↑ | |